

STATIONARY CLAMPING DEVICES


HYDROK RD

Stationary chuck with hydraulic actuation

Size 32, 42, 52, 65, 80, 100
Clamping range 3–100 mm

Advantages

- Ideal for automated clamping
- Angular contour requires less space
- Multiple clamping made possible in the smallest space
- Ideal for 5-sided machining
- Clamping is possible with workpiece end-stop or front end-stop
- Adaptation devices possible [modular system]

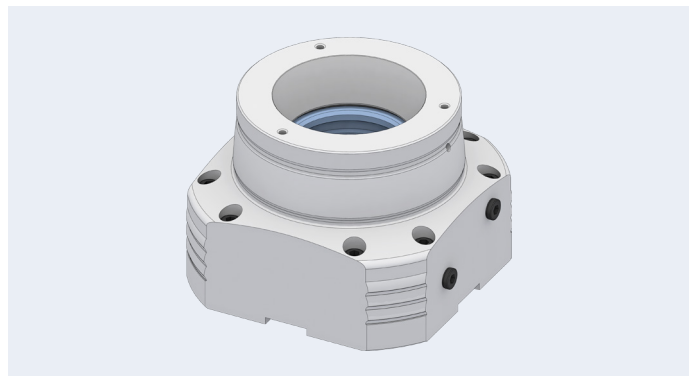


Clamping elements




Clamping head RD

Adaptations



MANDO Adapt T211 RD
[Mandrel-in-clamping-device, with draw bolt]



MANDO Adapt T212 RD
[Mandrel-in-clamping-device, without draw bolt]



Jaw module RD
[Adaptation for jaw clamping]



Magnet module RD
[Adaptation for magnetic clamping]

STATIONARY CLAMPING DEVICES

HYDROK SE

Stationary chuck with hydraulic actuation

Size 40, 52, 65, 100
Clamping range 3–100 mm

Advantages

- Ideal for automated clamping
- Angular contour requires less space
- Multiple clamping made possible in the smallest space
- Ideal for 5-sided machining
- Clamping is possible with workpiece end-stop or front end-stop
- Adaptation devices possible [modular system]




Clamping elements




Clamping head SE

Adaptations



MANDO Adapt T211 SE
[Mandrel-in-clamping-device, with draw bolt]



MANDO Adapt T212 SE
[Mandrel-in-clamping-device, without draw bolt]



Jaw module SE
[Adaptation for jaw clamping]



Magnet module SE
[Adaptation for magnetic clamping]