

ADAPTATION CLAMPING DEVICES


MANDO Adapt T812

Adaptation for changing over from O.D. clamping to I.D. clamping

Size	XS, S, 0, 1, 2, 3, 4
Clamping range	13–100 mm

Advantages

- Extremely fast conversion without detachment of the basic clamping device [1 – 2 min.]
- Large clamping range and vibration dampening due to vulcanized clamping elements
- Standard segmented clamping bushings and workpiece end-stops for machining to size available
- Radial clamping, without pullback – ideal for pick-off the main spindle
- Clamping without draw bolt, consequently ideal for blind bores

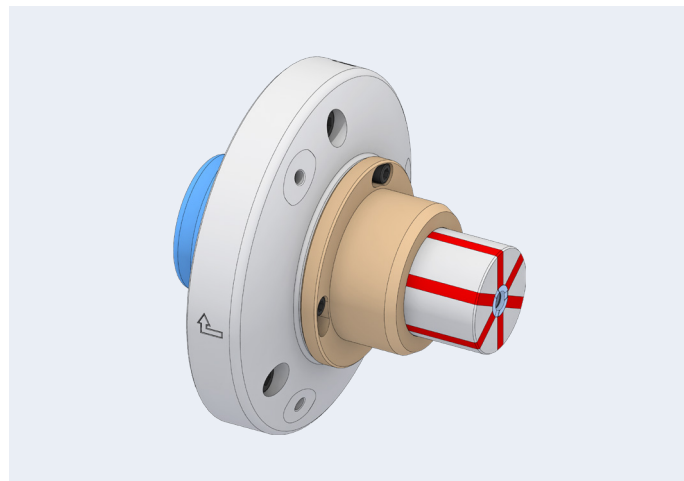

Clamping elements




SB segmented clamping bushing

Suitable for



SPANNTOP mini deadlength



SPANNTOP nova Combi deadlength